



# Intel Server System R2312SC2SHGR storage system



## Executive summary

After performing all tests, the Intel Server System R2312SC2SHGR system has been officially certified according to the [Open-E](#) Hardware Certification Program.

During the tests, it was found that the system is functional and efficient. With the [Open-E DSS V7](#) operating system installed, the Intel Server System R2312SC2SHGR is stable and performs well.

In general, the system can be used for many different applications, but the following are recommended:

### ✓ NAS Filer

For this application the following can be used:

- Twelve high capacity, enterprise class SATA hard drives provide a plenty of space for user files.
- Hardware RAID5, RAID6, and RAID60 for fault tolerance and the most efficient use of available disk space or RAID10 for faster random workloads.
- Two 1GbE interfaces for independent connection to different networks or link aggregation for improved throughput.

### ✓ iSCSI storage

The following features make Intel Server System R2312SC2SHGR good iSCSI storage:

- Hardware RAID5, RAID6, RAID10, RAID50 or RAID60 for high performance and data safety.
- Two 1GbE interfaces for fast MPIO connection.
- Redundant power supply for system reliability.

### ✓ Storage for CCTV

The following features make Intel Server System R2312SC2SHGR great storage for a backup:

- Twelve enterprise class SATA drives provide a lot of space for CCTV records.
- Two 1GbE interfaces for independent connection to different networks or link aggregation for improved throughput.
- Redundant power supply for system reliability.

## Certification notes:

We recommend using Balance-alb or Balance-rr bonding modes for link aggregation.

<b>Intel Server System R2312SC2SHGR hardware components</b> .....	4
<b>System R2312SC2SHGR photos</b> .....	5
<b>Auxiliary systems hardware components</b> .....	6
<b>Administration functionality</b> .....	7
<b>Network functionality</b> .....	8
Network test topology .....	8
802.3ad bonding mode test .....	9
Balance-alb bonding mode test .....	10
Balance-rr bonding mode test .....	11
Single NIC performance test .....	12
<b>RAID functionality</b> .....	13
RAID test topology.....	13
Hardware RAID0 test.....	14
Hardware RAID5 test.....	15
Hardware RAID6 test.....	16
Hardware RAID10 test.....	17
Hardware RAID50 test.....	18
Hardware RAID60 test.....	19
<b>NAS functionality</b> .....	20
NAS test topology.....	20
SMB test .....	21
<b>iSCSI functionality</b> .....	22
iSCSI Initiator test topology.....	22
iSCSI Target test topology .....	22
iSCSI Initiator test .....	23
iSCSI Target test .....	24

## Intel Server System R2312SC2SHGR hardware components

Technical specifications about the certified system are listed below:

<b>Model</b>	Intel Server System R2312SC2SHGR
<b>Operating system</b>	Open-E DSS V7 build 7637
<b>Enclosure/chassis</b>	Intel R2312SC2SHGR Chassis
<b>CPU</b>	Intel Xeon E5-2440 2.4GHz
<b>Motherboard</b>	Intel Server Board S2400SC
<b>Memory</b>	2x 8GB Samsung M393B1K70DH0-YH9
<b>Network</b>	Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)
<b>HW RAID</b>	Intel Integrated RAID Module RMS25PB040
<b>Hard disk drives</b>	12x 2TB Seagate Constellation ES ST31000524NS

TABLE 1: Hardware components list of Certified System with Open-E DSS V7



## Intel Server System R2312SC2SHGR photos



FIGURE 1: Front photo



FIGURE 2: Rear photo

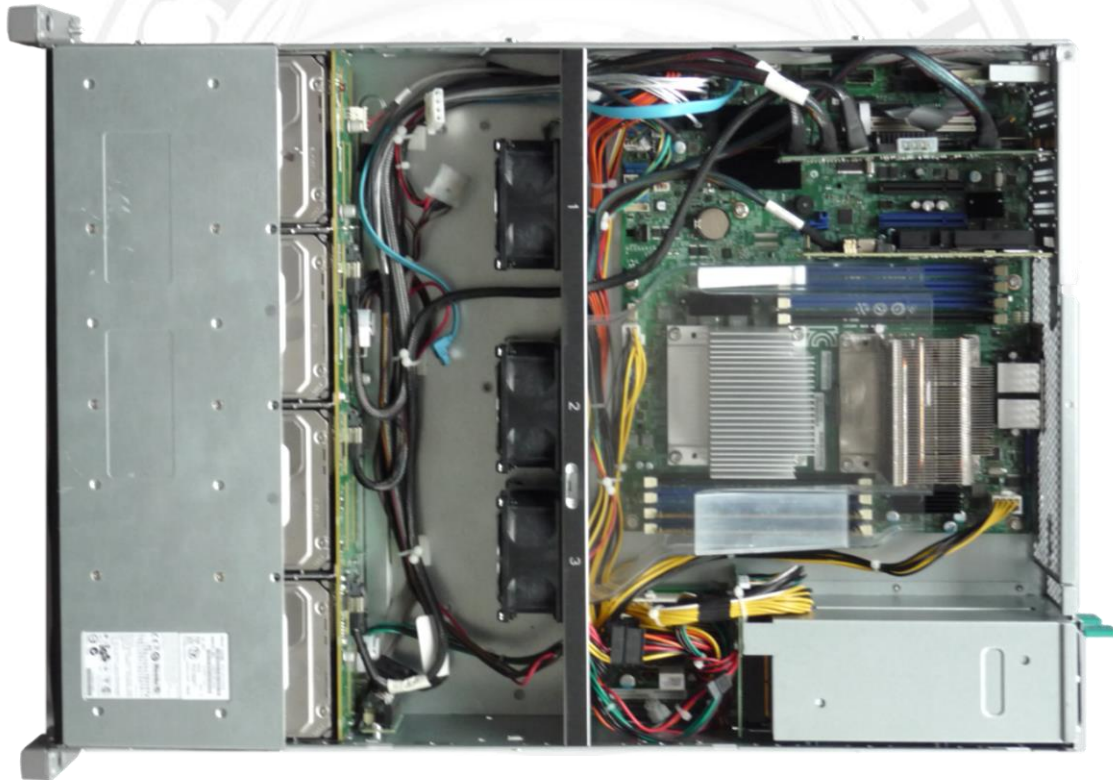


FIGURE 3: Top photo

## Auxiliary systems hardware components

Auxiliary systems with MS Windows or Open-E DSS V7 installed, used in Open-E Hardware Certification Process.

<b>Model</b>	Custom
<b>Operating system</b>	MS Windows Server 2008 R2
<b>Enclosure/chassis</b>	Inter-Tech IPC 4088 4HE
<b>Motherboard</b>	Asus P8B-E/4L
<b>CPU</b>	Intel Xeon Processor E3-1230 3.20 GHz
<b>Memory</b>	3x Kingston KVR1333D3E9S/4G DDR3 4GB
<b>Network</b>	Intel 82574L Gigabit Ethernet Controller (on-board)
<b>Hard disk drives</b>	Hitachi Deskstar 7K1000.C HDS721050CLA362 500GB

TABLE 2: Hardware components of first Workstation with MS Windows

<b>Model</b>	Custom
<b>Operating system</b>	MS Windows Server 2008 R2
<b>Enclosure/chassis</b>	Inter-Tech IPC 4088 4HE
<b>Motherboard</b>	Asus P8B-E/4L
<b>CPU</b>	Intel Xeon Processor E3-1230 3.20 GHz
<b>Memory</b>	3x Kingston KVR1333D3E9S/4G DDR3 4GB
<b>Network</b>	Intel 82574L Gigabit Ethernet Controller (on-board)
<b>Hard disk drives</b>	Hitachi Deskstar 7K1000.C HDS721050CLA362 500GB

TABLE 3: Hardware components of second Workstation with MS Windows

<b>Model</b>	Custom
<b>Operating system</b>	Open-E DSS V7 build 7637
<b>Enclosure/chassis</b>	Intel R2312SC2SHGR Chassis
<b>CPU</b>	Intel Xeon E5-2440 2.4GHz
<b>Motherboard</b>	Intel Server Board S2400SC
<b>Memory</b>	2x 8GB Samsung M393B1K70DH0-YH9
<b>Network</b>	Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)
<b>HW RAID</b>	Intel Integrated RAID Module RMS25PB040
<b>Hard disk drives</b>	12x 2TB Seagate Constellation ES ST31000524NS

TABLE 4: Hardware components of Workstation with Open-E DSS V7

Model	Supermicro SSE-G24-TG4
Description	24-ports 1GbE and 4-ports 10GbE switch

TABLE 5: Network switch details for 1GbE connections

## Administration functionality

The following functionality has been tested.

Drive identifier	OK
Power button	OK
Front and rear LEDs	OK

TABLE 6: Administration functionality test results



## Network functionality

Tests performed in this section check the functionality, performance and stability of the network solutions available in the Open-E DSS V7 product on the certified system.

The tests rely on configuring the iSCSI targets and copying the data from many *Workstations with MS Windows* through various network connections with big block size using appropriate testing tools.

### Network test topology

Network topology for Network testing is shown below.

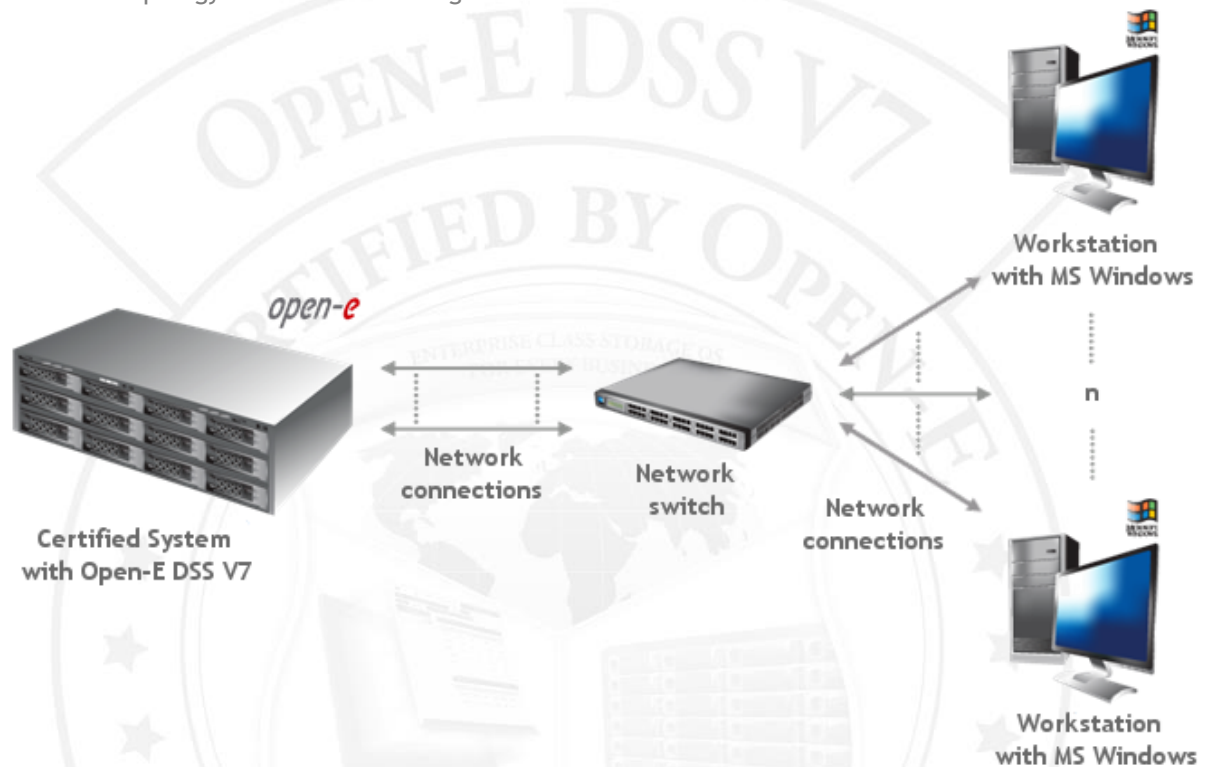


FIGURE 4: Network topology for Network testing



## 802.3ad bonding mode test

### 1. Test description

The test relies on configuring the iSCSI targets and copying the data from many *Workstations with MS Windows* through an 802.3ad bonding mode network connection with a 4MB block size using the iometer testing tool.

### 2. Test results for 802.3ad bonding mode test performed on Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

802.3ad bonding mode performance test results			
NIC model	Intel PRO / 1000 PT Dual Port Adapter (i82574L)		
Workstations with MS Windows	Write speed [MB/s]	Read speed [MB/s]	Performance test results
1 <sup>st</sup> Workstation	110.49	63.37	passed
2 <sup>nd</sup> Workstation	106.48	50.68	passed

TABLE 7: 802.3ad bonding mode performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

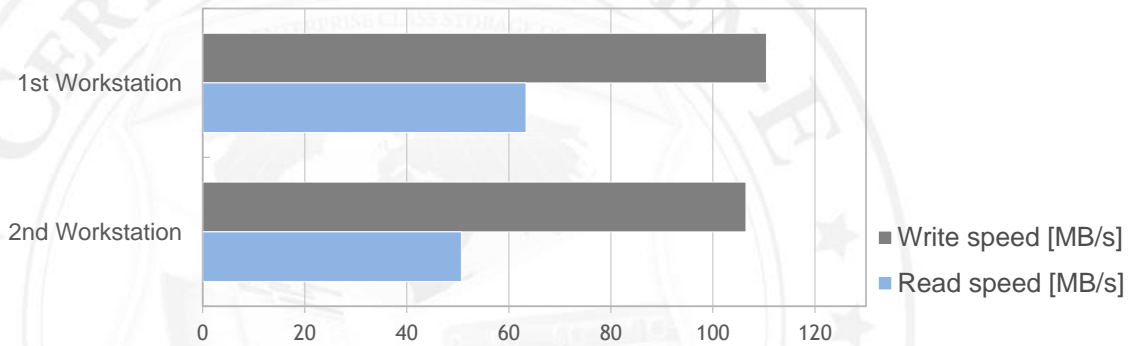


FIGURE 5: 802.3ad bonding mode performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## Balance-alb bonding mode test

### 1. Test description

The test relies on configuring the iSCSI targets and copying the data from many *Workstations with MS Windows* through a Balance-alb bonding mode network connection with a 4MB block size using the iometer testing tool.

### 2. Test results for Balance-alb bonding mode test performed on Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

Balance-alb bonding mode performance test results			
NIC model	Intel PRO / 1000 PT Dual Port Adapter (i82574L)		
Workstations with MS Windows	Write speed [MB/s]	Read speed [MB/s]	Performance test results
1 <sup>st</sup> Workstation	110.93	107.66	passed
2 <sup>nd</sup> Workstation	110.54	110.63	passed

TABLE 8: Balance-alb bonding mode performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

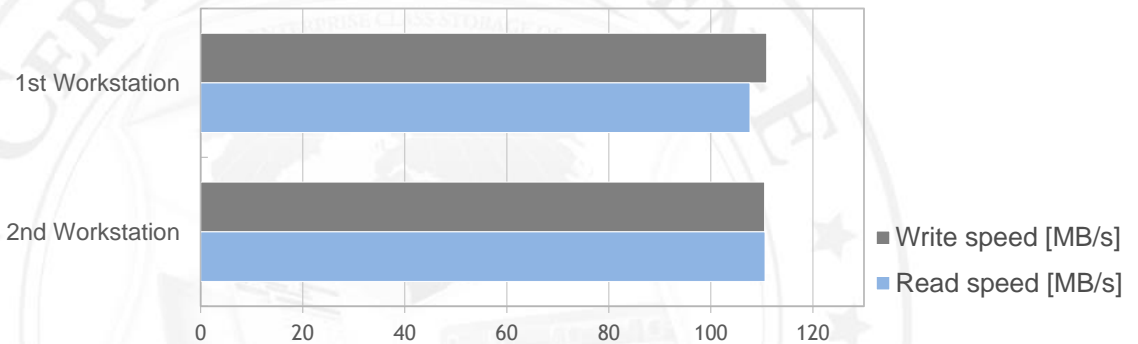


FIGURE 6: Balance-alb bonding mode performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## Balance-rr bonding mode test

### 1. Test description

The test relies on configuring the iSCSI targets and copying the data from many *Workstations with MS Windows* through a Balance-rr bonding mode network connection with a 4MB block size using the lometer testing tool.

### 2. Test results for Balance-rr bonding mode test performed on Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

Balance-rr bonding mode performance test results			
NIC model	Intel PRO / 1000 PT Dual Port Adapter (i82574L)		
Workstations with MS Windows	Write speed [MB/s]	Read speed [MB/s]	Performance test results
1 <sup>st</sup> Workstation	110.11	96.73	passed
2 <sup>nd</sup> Workstation	111.55	97.33	passed

TABLE 9: Balance-rr bonding mode performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

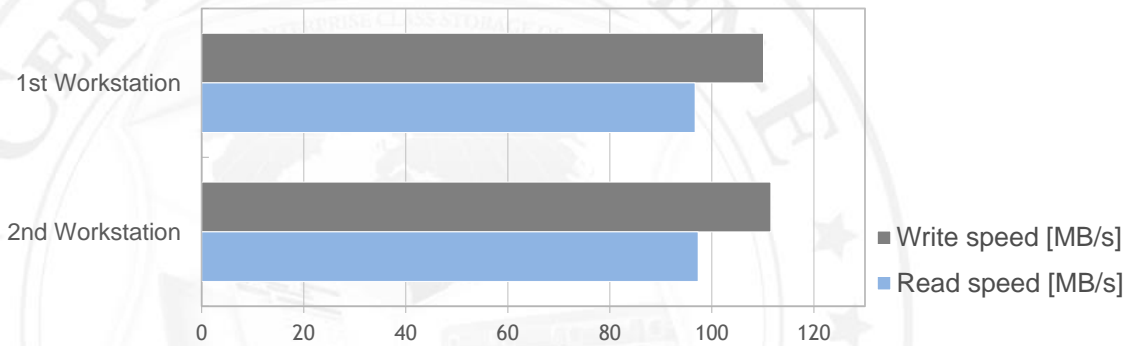


FIGURE 7: Balance-rr bonding mode performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## Single NIC performance test

### 1. Test description

The test relies on configuring the iSCSI targets and copying the data from *Workstations with MS Windows* through single NIC with a 4MB block size using the iometer testing tool.

### 2. Test results for single NIC test performed on Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

Single NIC performance test results			
NIC model	Intel PRO / 1000 PT Dual Port Adapter (i82574L)		
Workstations with MS Windows	Write speed [MB/s]	Read speed [MB/s]	Performance test results
1 <sup>st</sup> Workstation	109.53	111.99	passed

TABLE 10: Single NIC performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

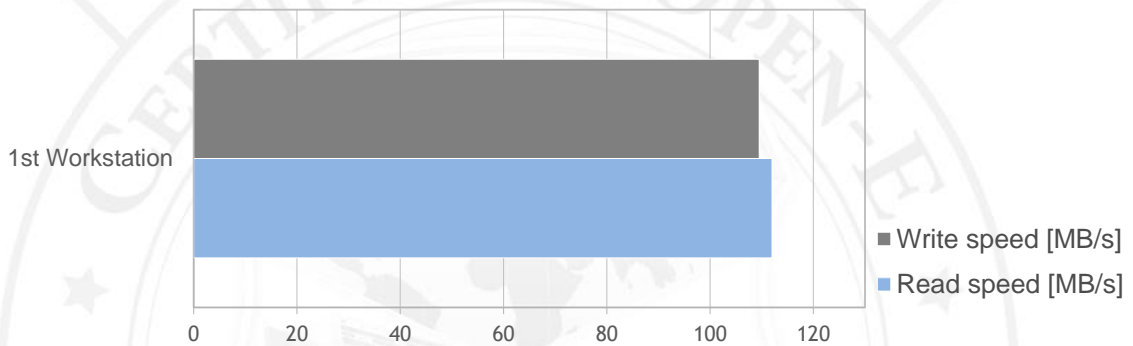


FIGURE 8: Single NIC performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## RAID functionality

Tests performed in this section check the functionality, performance and stability of Open-E DSS V7 storage devices on the certified system.

Tests in this section rely on the creation of the RAID units on 0, 5, 6, 10, 50 and 60 levels, configuring the iSCSI target and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the lometer testing tool.

### RAID test topology

Network test topology for RAID testing is shown below

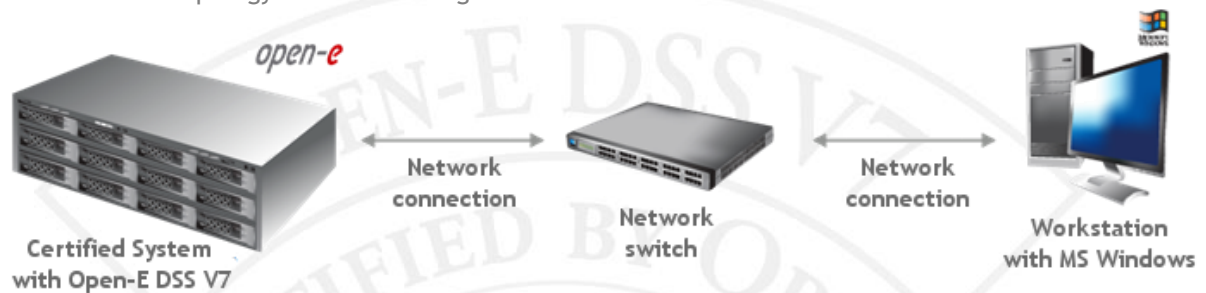


FIGURE 9: Network test topology for RAID testing

## Hardware RAID0 test

### 1. Test description

The test relies on creation of the RAID0 unit on all hard disk drives, configuring the iSCSI target and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the iometer testing tool.

### 2. Test results for RAID0 and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

RAID0 performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	31.97	70.03	passed
32	106.39	109.48	passed
64	111.70	111.40	passed
128	107.40	111.52	passed
256	109.11	112.04	passed
512	108.37	112.03	passed
1024	108.42	111.90	passed
4096	110.30	111.88	passed

TABLE 11: RAID0 performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

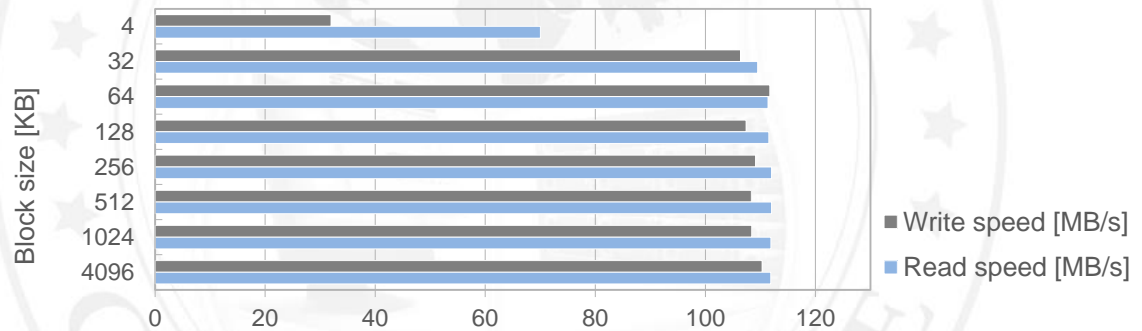


FIGURE 10: RAID0 performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## Hardware RAID5 test

### 1. Test description

The test relies on creation of the RAID5 unit on all hard disk drives, configuring the iSCSI target and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the iometer testing tool.

### 2. Test results for RAID5 and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

RAID5 performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	31.81	69.50	passed
32	103.04	106.03	passed
64	111.56	106.97	passed
128	109.64	108.18	passed
256	108.36	108.73	passed
512	108.11	108.64	passed
1024	109.64	108.49	passed
4096	111.12	108.63	passed

TABLE 12: RAID5 performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

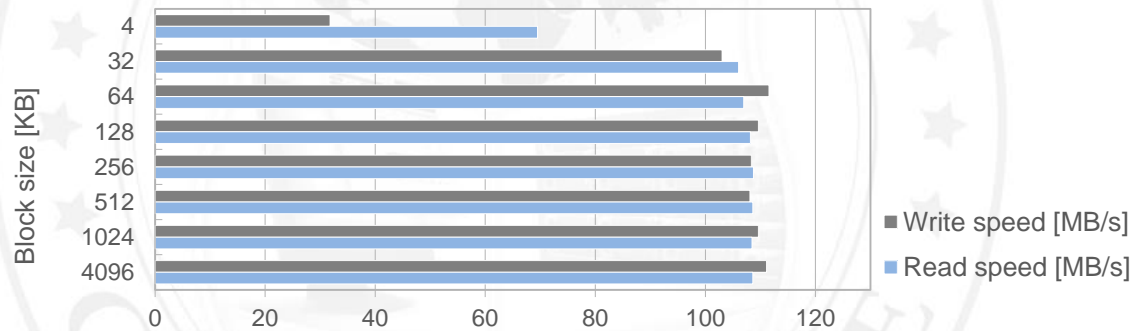


FIGURE 11: RAID5 performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## Hardware RAID6 test

### 1. Test description

The test relies on creation of the RAID6 unit on all hard disk drives, configuring the iSCSI target and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the iometer testing tool.

### 2. Test results for RAID6 and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

RAID6 performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	31.96	70.64	passed
32	106.05	109.36	passed
64	111.71	111.21	passed
128	108.13	111.40	passed
256	108.36	111.82	passed
512	108.86	112.02	passed
1024	109.53	112.01	passed
4096	108.40	111.88	passed

TABLE 13: RAID6 performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

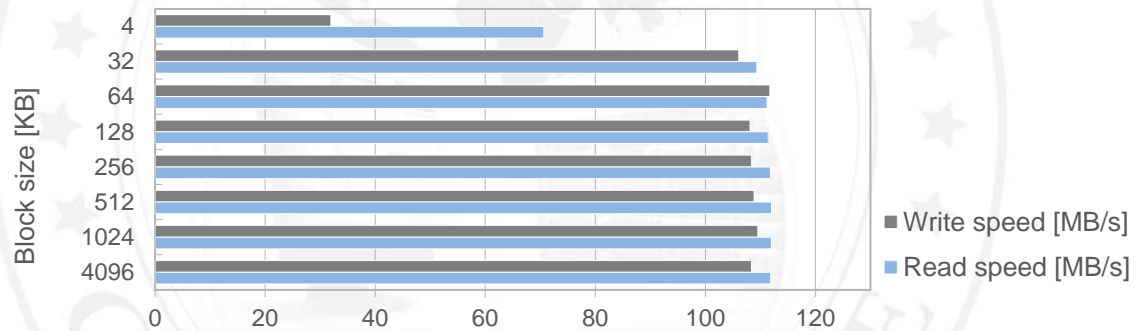


FIGURE 12: RAID6 performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)



## Hardware RAID10 test

### 1. Test description

The test relies on creation of the RAID10 unit on all hard disk drives, configuring the iSCSI target and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the lometer testing tool.

### 2. Test results for RAID10 and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

RAID10 performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	31.60	69.18	passed
32	105.44	108.67	passed
64	111.85	109.54	passed
128	108.10	110.45	passed
256	107.72	111.34	passed
512	107.90	111.31	passed
1024	110.42	111.30	passed
4096	108.84	111.14	passed

TABLE 14: RAID10 performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

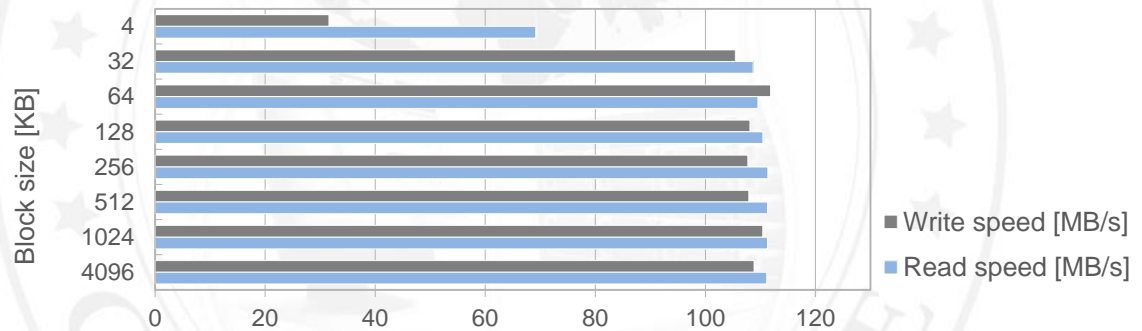


FIGURE 13: RAID10 performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## Hardware RAID50 test

### 1. Test description

The test relies on creation of the RAID50 unit on all hard disk drives, configuring the iSCSI target and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the lometer testing tool.

### 2. Test results for RAID50 and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

RAID50 performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	32.04	69.44	passed
32	102.18	106.41	passed
64	111.24	107.46	passed
128	108.58	108.56	passed
256	107.72	109.13	passed
512	109.56	109.16	passed
1024	107.95	108.99	passed
4096	109.57	108.95	passed

TABLE 15: RAID50 performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

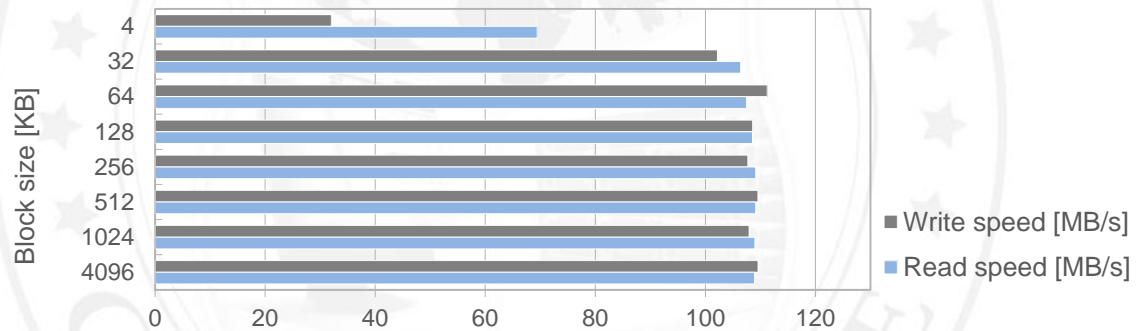


FIGURE 14: RAID50 performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## Hardware RAID60 test

### 1. Test description

The test relies on creation of the RAID60 unit on all hard disk drives, configuring the iSCSI target and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the lometer testing tool.

### 2. Test results for RAID60 and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

RAID60 performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	31.76	69.75	passed
32	103.24	106.20	passed
64	111.66	107.08	passed
128	110.40	108.25	passed
256	110.20	109.03	passed
512	108.93	108.78	passed
1024	107.83	108.65	passed
4096	108.80	108.80	passed

TABLE 16: RAID60 performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

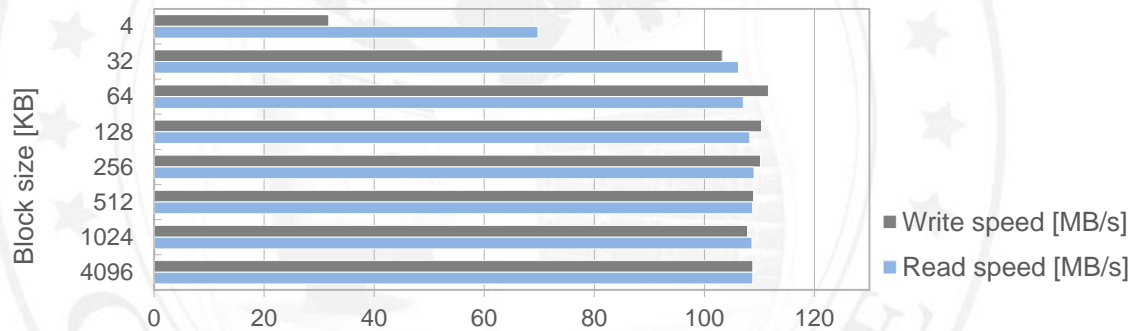


FIGURE 15: RAID60 performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## NAS functionality

Tests performed in this section check the functionality, performance and stability of the NAS protocols in the Open-E DSS V7 product on the certified system.

The tests rely on creating NAS shares and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the lometer testing tool.

### NAS test topology

Network topology for NAS testing is shown below.

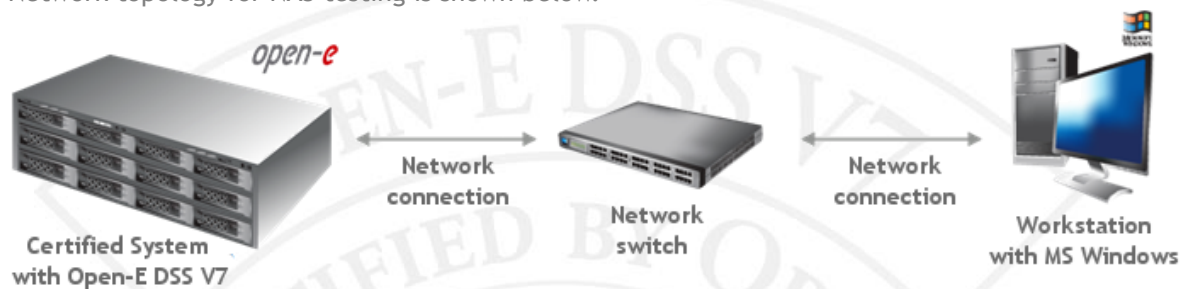


FIGURE 16: Network topology for NAS testing

## SMB test

### 1. Test description

The tests rely on creating NAS shares and copying the data from a *Workstation with MS Windows* via network connection with various block sizes using the lometer testing tool.

### 2. Test results for SMB and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

SMB performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	87.85	94.30	passed
32	112.60	112.70	passed
64	112.92	112.67	passed
128	112.86	112.74	passed
256	112.86	112.77	passed
512	112.92	112.77	passed
1024	112.91	112.76	passed
4096	112.77	112.60	passed

TABLE 17: SMB performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

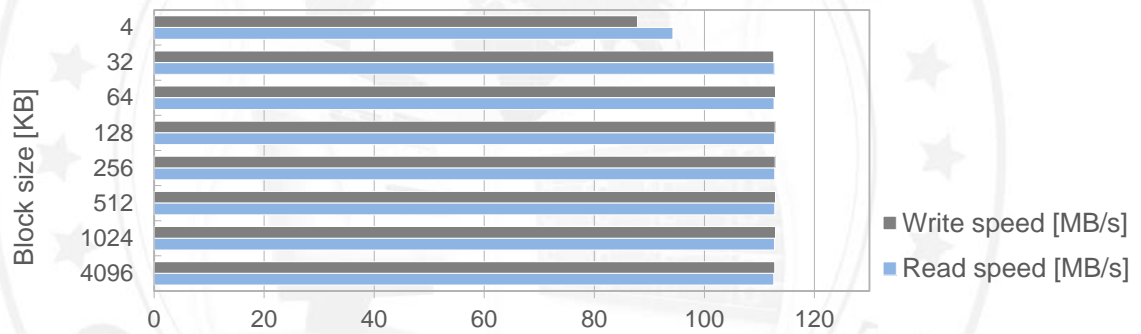


FIGURE 17: SMB performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## iSCSI functionality

Tests performed in this section check the functionality, performance and stability of the iSCSI protocol in the Open-E DSS V7 product on the certified system.

### iSCSI Initiator test topology

Network topology for iSCSI Initiator testing is shown below.

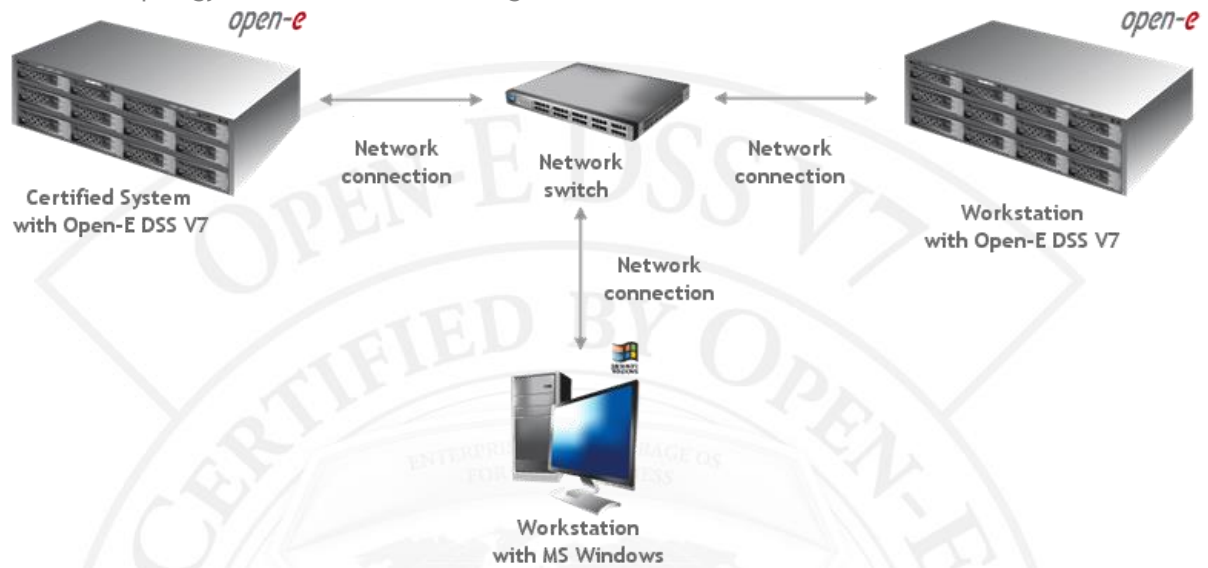


FIGURE 18: Network topology for iSCSI Initiator testing

### iSCSI Target test topology

Network topology for iSCSI Target testing is shown below.



FIGURE 19: Network topology for iSCSI Target testing

## iSCSI Initiator test

### 1. Test description

The test relies on using the storage connected via the built-in iSCSI Initiator for NAS volumes, creating SMB shares on these NAS volumes and copying data from a *Workstation with MS Windows* to them with various block sizes using the lometer testing tool.

### 2. Test results for iSCSI Initiator and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

iSCSI Initiator performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	77.98	93.58	passed
32	109.02	112.61	passed
64	111.91	112.21	passed
128	112.47	112.75	passed
256	112.65	112.78	passed
512	112.60	112.77	passed
1024	112.54	112.51	passed
4096	112.41	112.59	passed

TABLE 18: iSCSI Initiator performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

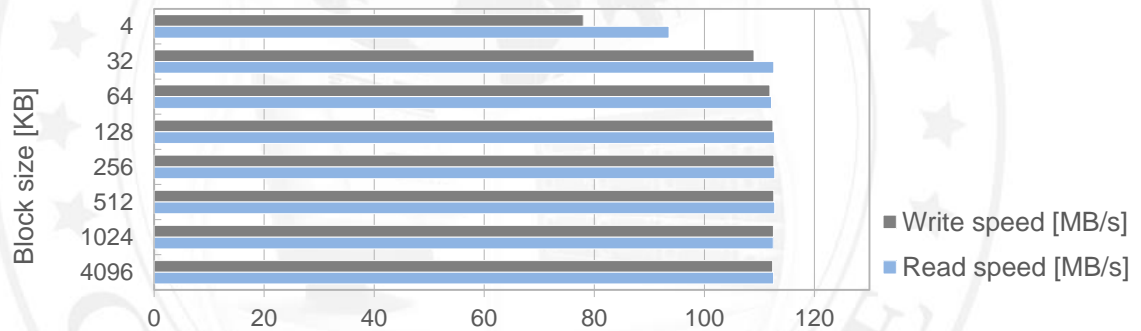


FIGURE 20: iSCSI Initiator performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

## iSCSI Target test

### 1. Test description

The test relies on creating the iSCSI target on the certified system and copying the data from a *Workstation with MS Windows* to it with various block sizes using the *Iometer* tool.

### 2. Test results for iSCSI Target and Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

iSCSI Target performance test results			
Block size [KB]	Write speed [MB/s]	Read speed [MB/s]	Performance test results
4	31.76	70.10	passed
32	103.10	106.30	passed
64	111.63	107.11	passed
128	108.74	108.21	passed
256	109.06	108.94	passed
512	107.94	108.77	passed
1024	107.84	108.63	passed
4096	109.91	108.60	passed

TABLE 19: iSCSI Target performance test results table for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)

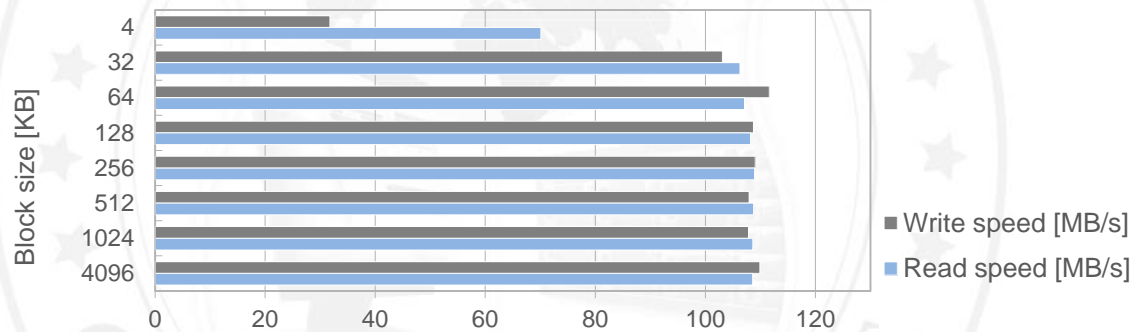


FIGURE 21: iSCSI Target performance test results chart for Intel PRO/1000 PT Dual Port Server Adapter (i82574L) (on-board)